

Cultured Marble Application Equipment Systems

Advanced technologies for today's most cost-efficient and highest quality MACT-compliant cast polymer applications.

Gel Coat Systems



Better Control


- Positive volumetric control
- Lower velocity spray
- Efficient operation
- No solvent flush
- Non atomizing technology
- Drop forged gun heads and handles
- Maximum mobility
- Extremely rugged production system
- 100% more filter area than other systems
- Unison system available
- Reliable, trouble-free material delivery

Environmentally friendly

- All systems SCAQMD compliant
- Low emission levels
- No catalyst fumes in workplace air supply
- Reduced waste
- Reduced overspray
- Reduced styrene emissions

Easy maintenance

- Long-lasting severe-duty fluid pump
- Low maintenance

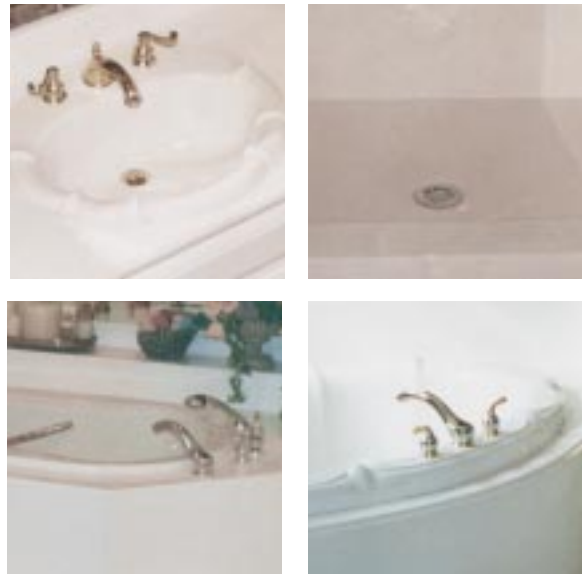

Binks Century LEL Gel Coat Gun is legendary for its easy operation and low maintenance.

Binks Super Slave Gel Coat Systems use LEL technology to offer maximum resin transfer via lower velocity spray. Available in a Cart-Mounted model (shown) Part No. 105-5402, and a Wall-Mounted model Part No. 105-5302.



Accessories for Cultured Marble



Binks Century HVLG Gun 102-2500



Poly-Craft HVLG Gun 202-755

PART NUMBER	DESCRIPTION
102-2500	Century HVLG AA/A Gel Coat Gun
202-755	HVLG AA/A Gel Coat Gun
6302-511-4	7N Gel Coat Gun*
6214-5111-5	2001GW Gun*
202-1055	HVLG Grani-Gun
107-1470	Mini-Sprayer Gel Coat Gun*
202-55-2	Drum Agitator 55-Gallon 2 SS Paddles
202-55-4	Drum Agitator 55-Gallon 4 SS Paddles
41-9000	Elevator for 55-Gallon Agitator
80-228	Two Quart "Steady-Grip" Pressure Cup
80-350	Two Quart "Steady-Grip" Wide Mouth Pressure Cup
HAF-502	CleanAir Centrifugal Filter-Regulator
HFRL-512	CleanAir Coalescer Filter-Regulator Unit
830001	Heater – 240 Volts
830000	Heater – 120 Volts
830002	Heater – 440 Volts

*Not SCAQMD Compliant

Granite Spray Systems



Poly-Craft 202-1055 Grani-Gun



Poly-Craft Grani-Tec System 205-1000



Binks Grani Coat 2-Gallon Tank System 105-1084 (.110 orifice)

Better Control

- Automatic recirculation mode[†]
- No static pressure
- Fast, predictable spray patterns
- Adjustable disperse air control
- Requires less than 10 psi disperse nozzle air pressure
- Ideal for intermittent production
- Instant start catalyst delivery

Environmentally Friendly

- SCAQMD compliant

Easy to Use

- Completely portable[†]
- Ready to use right out of the box
- Low maintenance

[†] 205-1000 Only

Specifications are subject to change.
Contact ITW Industrial Finishing for information on the latest specifications.

Finest quality granite effects and reliable spray patterns at high production rates



ITW Industrial Finishing

Binks
630-237-5000
Fax 630-237-5012
Email: ruso@itwif.com

www.binks.com

Orders Only
1-800-423-3694

